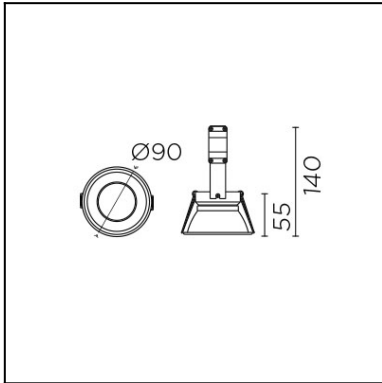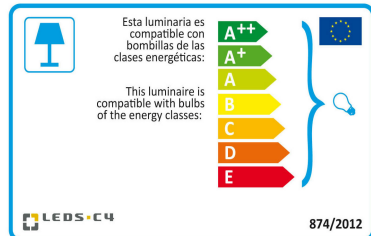**IN** ⌂

Design by JOSEP PATSI

The photograph may not match the reference exactly. Please read the product description to identify the finish.

Download photometric file .ldt /.ies

Esta luminaria es compatible con bombillas de las clases energéticas:

This luminaire is compatible with bulbs of the energy classes:

A++
A+
A
B
C
D
E

LEDS·C4

874/2012

Click on image to download energy label

Description

A round downlight for recessed installation, with high visual comfort avoiding problems of dazzling. Housing made in repelled steel plate and light fixing springs in stainless steel with high resistance to mechanical deformation. Fixed version (not directable). GU10 and GU5.3 lampholders (both included).

TECHNICAL CHARACTERISTICS

Type:	DOWNLIGHT RECESSED
IP Protection degrees:	IP23
Light source 1:	1 x GU5.3
Bulb specified at the product label	50W
Total power consumption (W):	50
Voltage / Frequency:	230V-12V/50-60Hz
Warranty:	2
Units per box:	80
Net Weight (Kg):	0.165
EAN Code:	8435381440251

CE   0,5m

MATERIALS / FINISHES

Structure material: Steel

Structure finish: Black

GEAR

This item requires gear. It is not included.

71-4032-N3-M2

LED module. For installation, the light must be completed with one of the different surrounds available.

|	
Structure material:	Aluminium
Structure finish:	Grey
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

Ø50

56

IP20

71-4033-N3-M2

LED module. For installation, the light must be completed with one of the different surrounds available.

|	
Structure material:	Aluminium
Structure finish:	Grey
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

Ø50

56

IP20

71-3885-N3-M2

LED module. For installation, the light must be completed with one of the different surrounds available.

|	
Structure material:	Aluminium
Structure finish:	Grey
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

Ø50

56

IP20

71-3886-N3-M2

LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material:	Aluminium
Structure finish:	Grey
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

IP20

(+34) 973 468 100
leds-c4@leds-c4.com
www.leds-c4.com

71-4032-14-M2

LED module. For installation, the light must be completed with one of the different surrounds available.

|	
Structure material:	Aluminium
Structure finish:	White
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

Ø50

56

IP20

71-4033-14-M2

LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material:	Aluminium
Structure finish:	White
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

Ø50

56

IP20

71-3885-14-M2

LED module. For installation, the light must be completed with one of the different surrounds available.

|	
Structure material:	Aluminium
Structure finish:	White
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

Ø50

56

IP20

71-3886-14-M2

LED module. For installation, the light must be completed with one of the different surrounds available.

|	
Structure material:	Aluminium
Structure finish:	White
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

Ø50

56

IP20

71-5156-14-M2V1

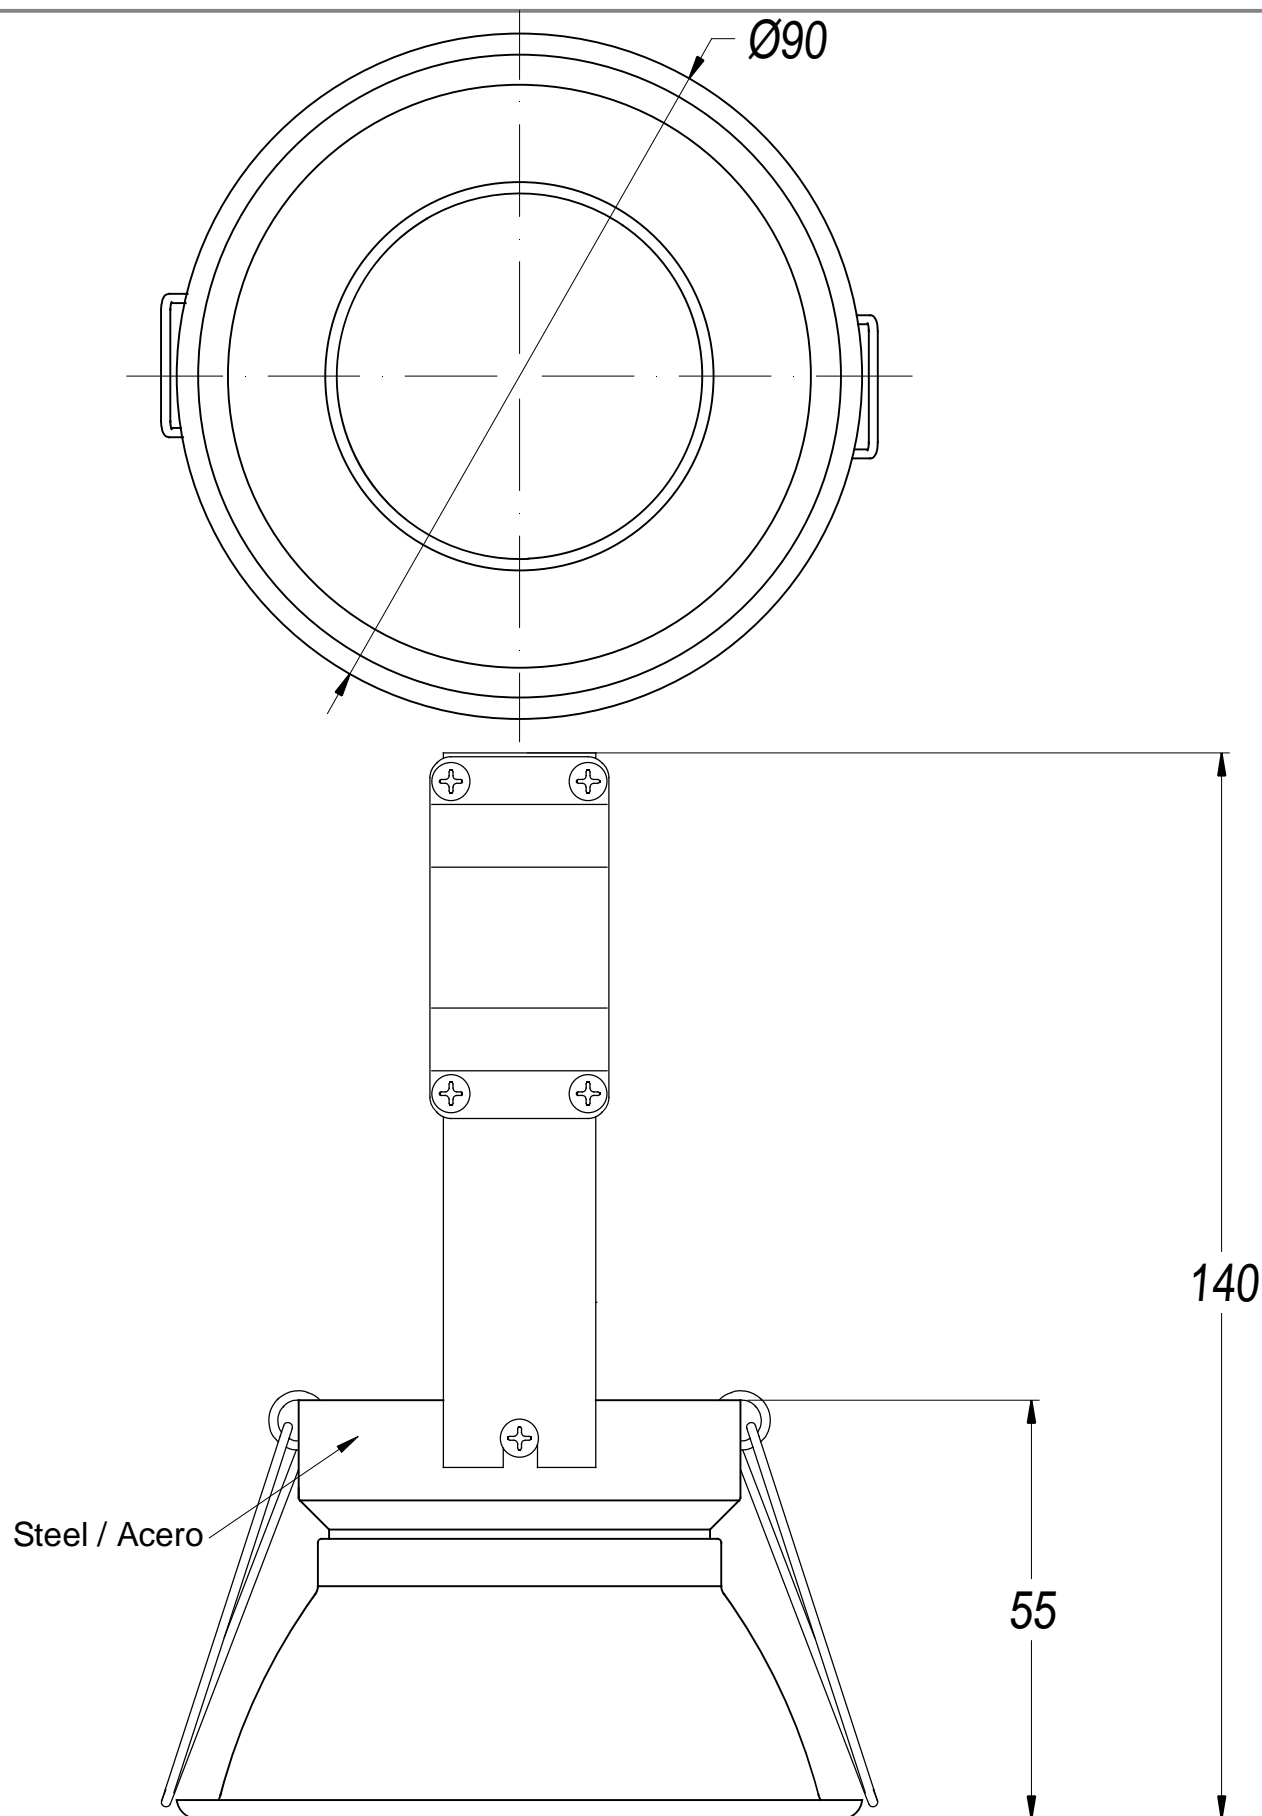LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material:	Aluminium
Structure finish:	White
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

Ø50

80

IP20

71-5157-14-M2V1

LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material:	Aluminium
Structure finish:	White
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

IP20

71-5086-14-M2V1

LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material:	Aluminium
Structure finish:	White
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

Ø50

80

IP20

71-5087-14-M2V1

LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material:	Aluminium
Structure finish:	White
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

Ø50

80

IP20

Ø90

140

Steel / Acero

55

Ø82

0-25mm

05-11-15

1

OFF
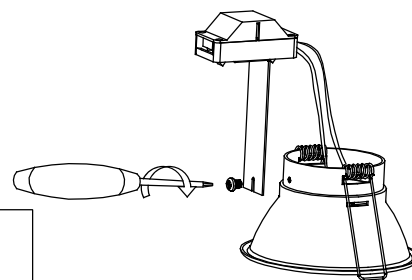
- DN-1600V1 / Ø82mm
- DN-1601V1 / Ø112mm

*

GU 10

2

GU 10

3

min. 160mm (DN-1601)
min. 140mm (DN-1600)

230V/240V

min. 50mm.   min. 50mm.

⚠️
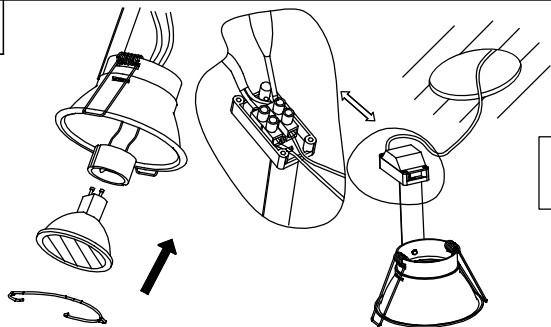
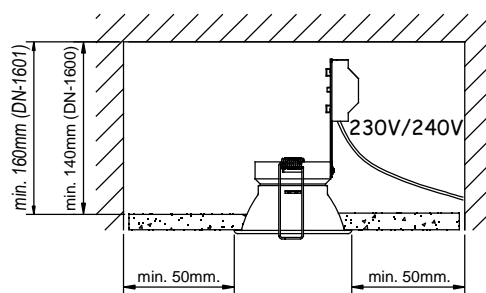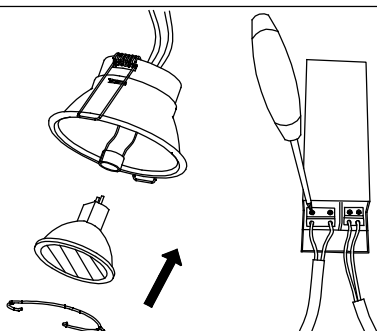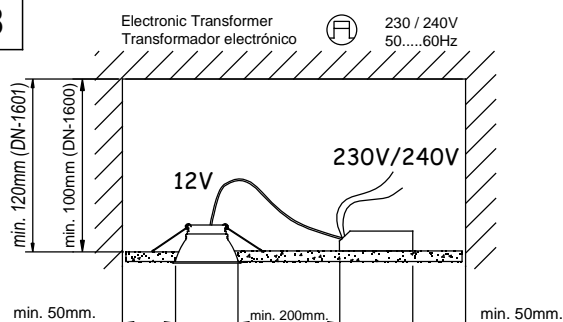**- Transparent decorative clip:**
(Only Led bulb compatible).

- Metallic clip:
(Halogen and Led bulb compatible).

2

GU 5.3

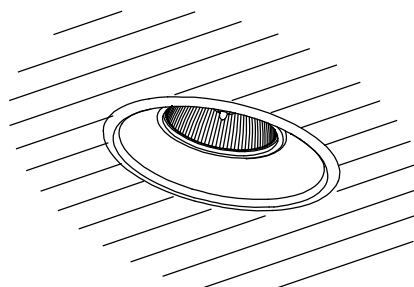**3**

Electronic Transformer
Transformador electrónico   230 / 240V
50.....60Hz

min. 120mm (DN-1601)
min. 100mm (DN-1600)

12V   230V/240V

min. 50mm.   min. 200mm.   min. 50mm.

4

5

ON

03/11/15