



Design by Francesc Vilaró



The photograph may not match the reference exactly. Please read the product description to identify the finish.

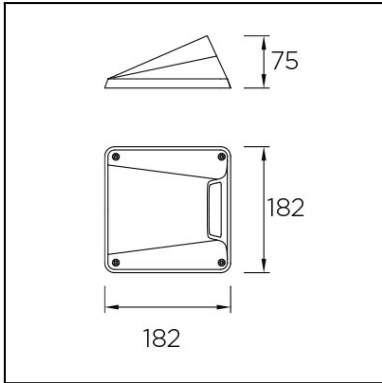

Download photometric file .ldt /.ies

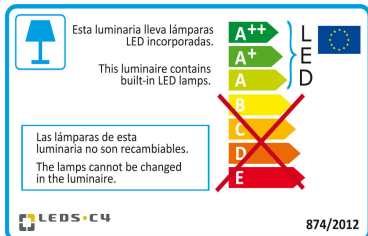

Click on image to download energy label

TECHNICAL CHARACTERISTICS

Type:	Beacon
IP Protection degrees:	IP67
Light source 1:	4 x LED
Bulb specified at the product label	4.3 Warm White - 3000K 296 lm ^(N) CRI 80
IK Protection degrees:	IK09
Total power consumption (W):	5.5 W
Angle of the optics / Reflector:	45°
Voltage / Frequency:	100-240VAC/50-60Hz
Warranty:	2
Option to extend the guarantee:	5
Units per box:	8
Net Weight (Kg):	0.860
EAN Code:	8435381414047



↗ 0° a 15°

MATERIALS / FINISHES

Structure material: High purity aluminium


Structure finish: Urban grey

Diffuser material: Methacrylate

Diffuser finish: Transparent



GEAR

Multi-voltage electronic gear included (Yes)

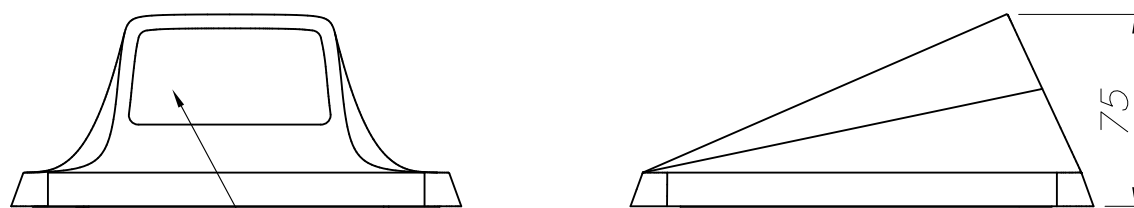

PMMA TRANSPARENTE
TRANSPARENT PMMA

ALUMINIO INYECTADO
INJECTED ALUMINIUM

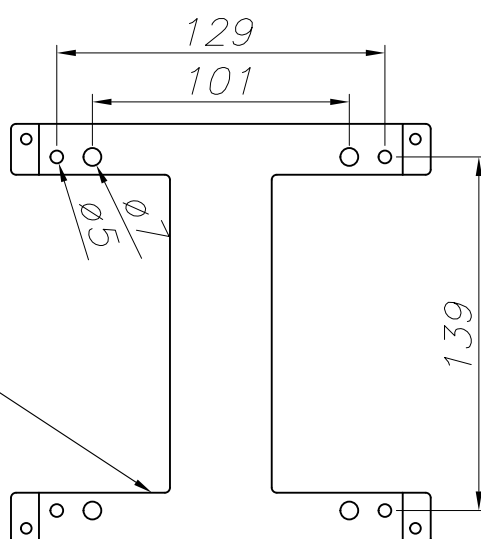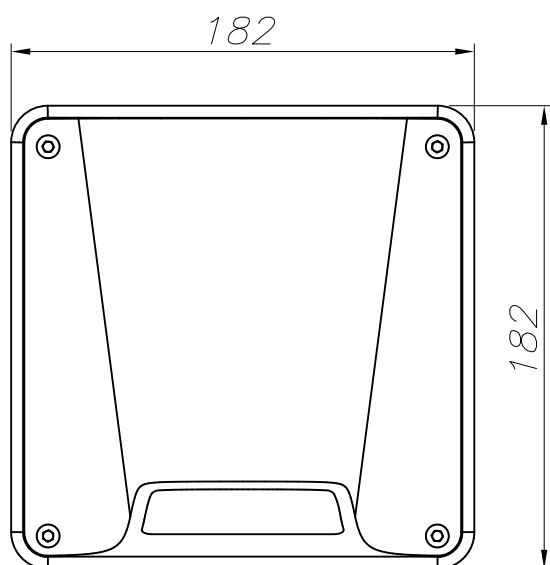

ACERO GALVANIZADO
GALVANIZED STEEL

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE

