



Design by Francesc Vilaró



The photograph may not match the reference exactly. Please read the product description to identify the finish.

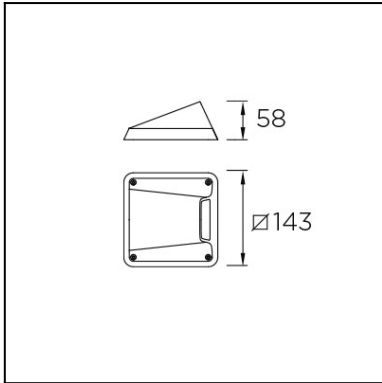

Download photometric file .ldt /.ies

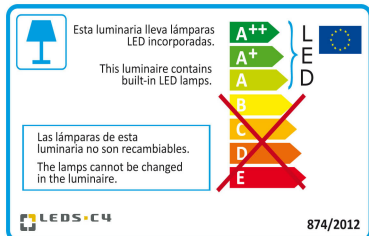

Click on image to download energy label

#### TECHNICAL CHARACTERISTICS

Type:	Beacon
IP Protection degrees:	IP67
Light source 1:	2 x LED
Bulb specified at the product label	2.1 Warm White - 3000K 148 lm <sup>(N)</sup> CRI 80
IK Protection degrees:	IK10
Total power consumption (W):	3.4
Angle of the optics / Reflector:	45°
Voltage / Frequency:	100-240VAC/50-60Hz
Warranty:	2
Option to extend the guarantee:	5
Units per box:	12
Net Weight (Kg):	0.540
EAN Code:	8435381439187



↗ 0° a 15°

#### MATERIALS / FINISHES

**Structure material:** High purity aluminium


**Structure finish:** Urban grey

**Diffuser material:** Methacrylate

**Diffuser finish:** Transparent


#### GEAR

Multi-voltage electronic gear included (Yes)

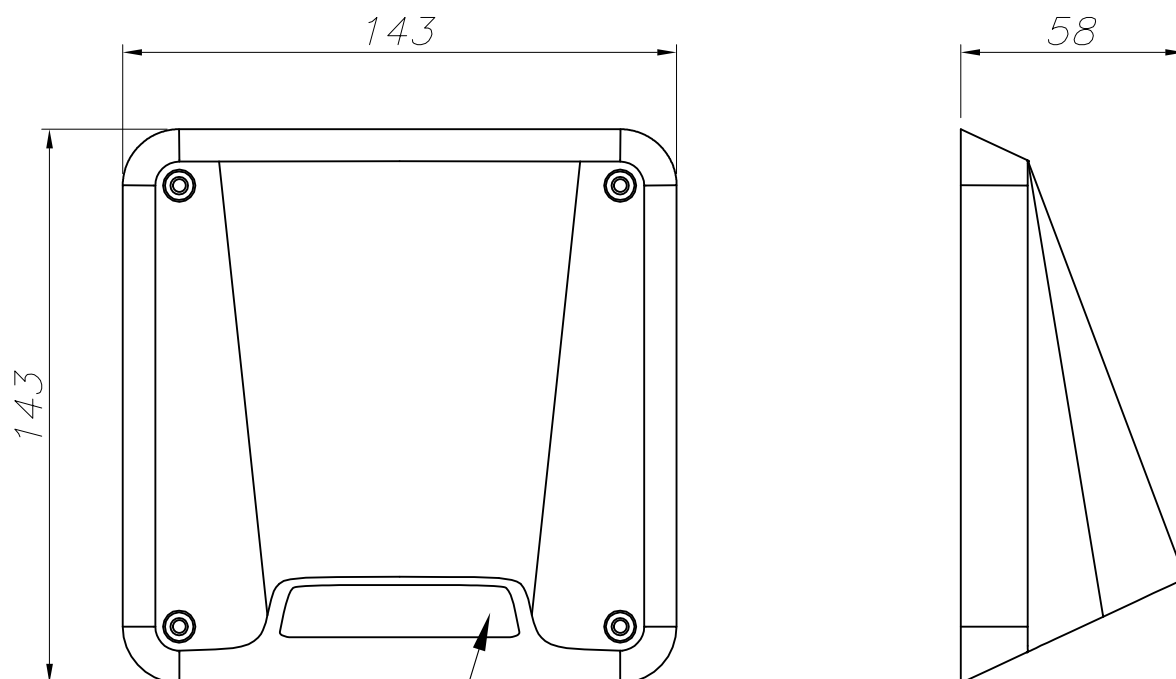

PMMA TRANSPARENTE  
TRANSPARENT PMMA

ALUMINIO INYECTADO  
INJECTED ALUMINIUM

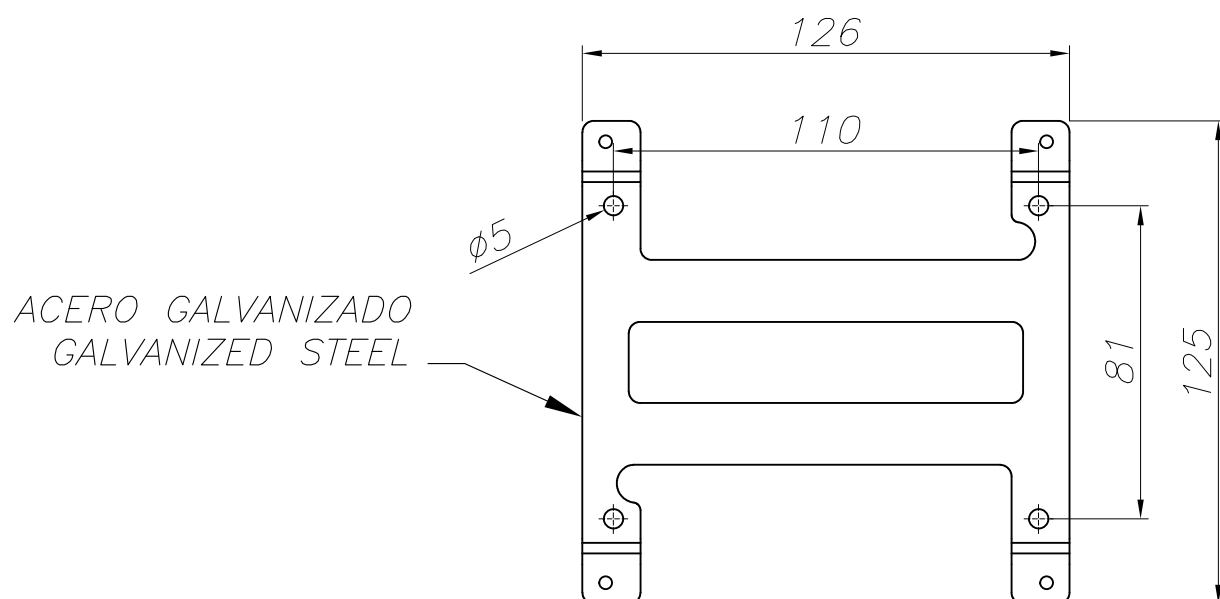

ACERO GALVANIZADO  
GALVANIZED STEEL

PLANTILLA DE INSTALACIÓN  
INSTALLATION TEMPLATE

