





The photograph may not match the reference exactly. Please read the product description to identify the finish.

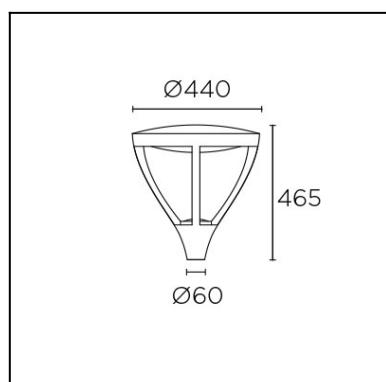

Download photometric file .ldt / .ies

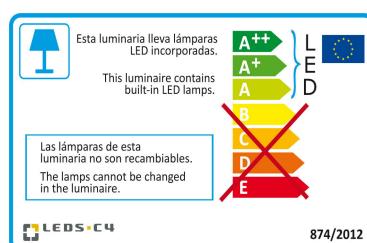

Click on image to download energy label

TECHNICAL CHARACTERISTICS

Type:	Streetlight head
IP Protection degrees:	IP65
Light source 1:	324 x LED
Bulb specified at the product label	39.4 Neutral white - 4000K 5452 lm ^(N) CRI 80
IK Protection degrees:	IK10
Total power consumption (W):	44.9 W
Voltage / Frequency:	100-277V/ 50-60Hz
Warranty:	2
Option to extend the guarantee:	No
Units per box:	1
Net Weight (Kg):	5.940
EAN Code:	8435381443535



MATERIALS / FINISHES

Structure material: High purity aluminium

Diffuser material: Polycarbonate

Structure finish: Urban grey

Diffuser finish: Semitransparent

GEAR


Multi-voltage electronic gear included (Yes)


55-9305-48-48



Column made of galvanised cast steel. Height of 3.5 m.
Suitable for bulbs with a 6 cm diameter entrance.
Installation kit includes fixing bolts.

Structure material: Galvanized steel

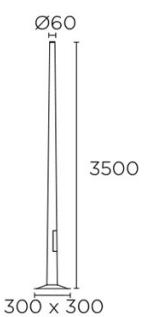

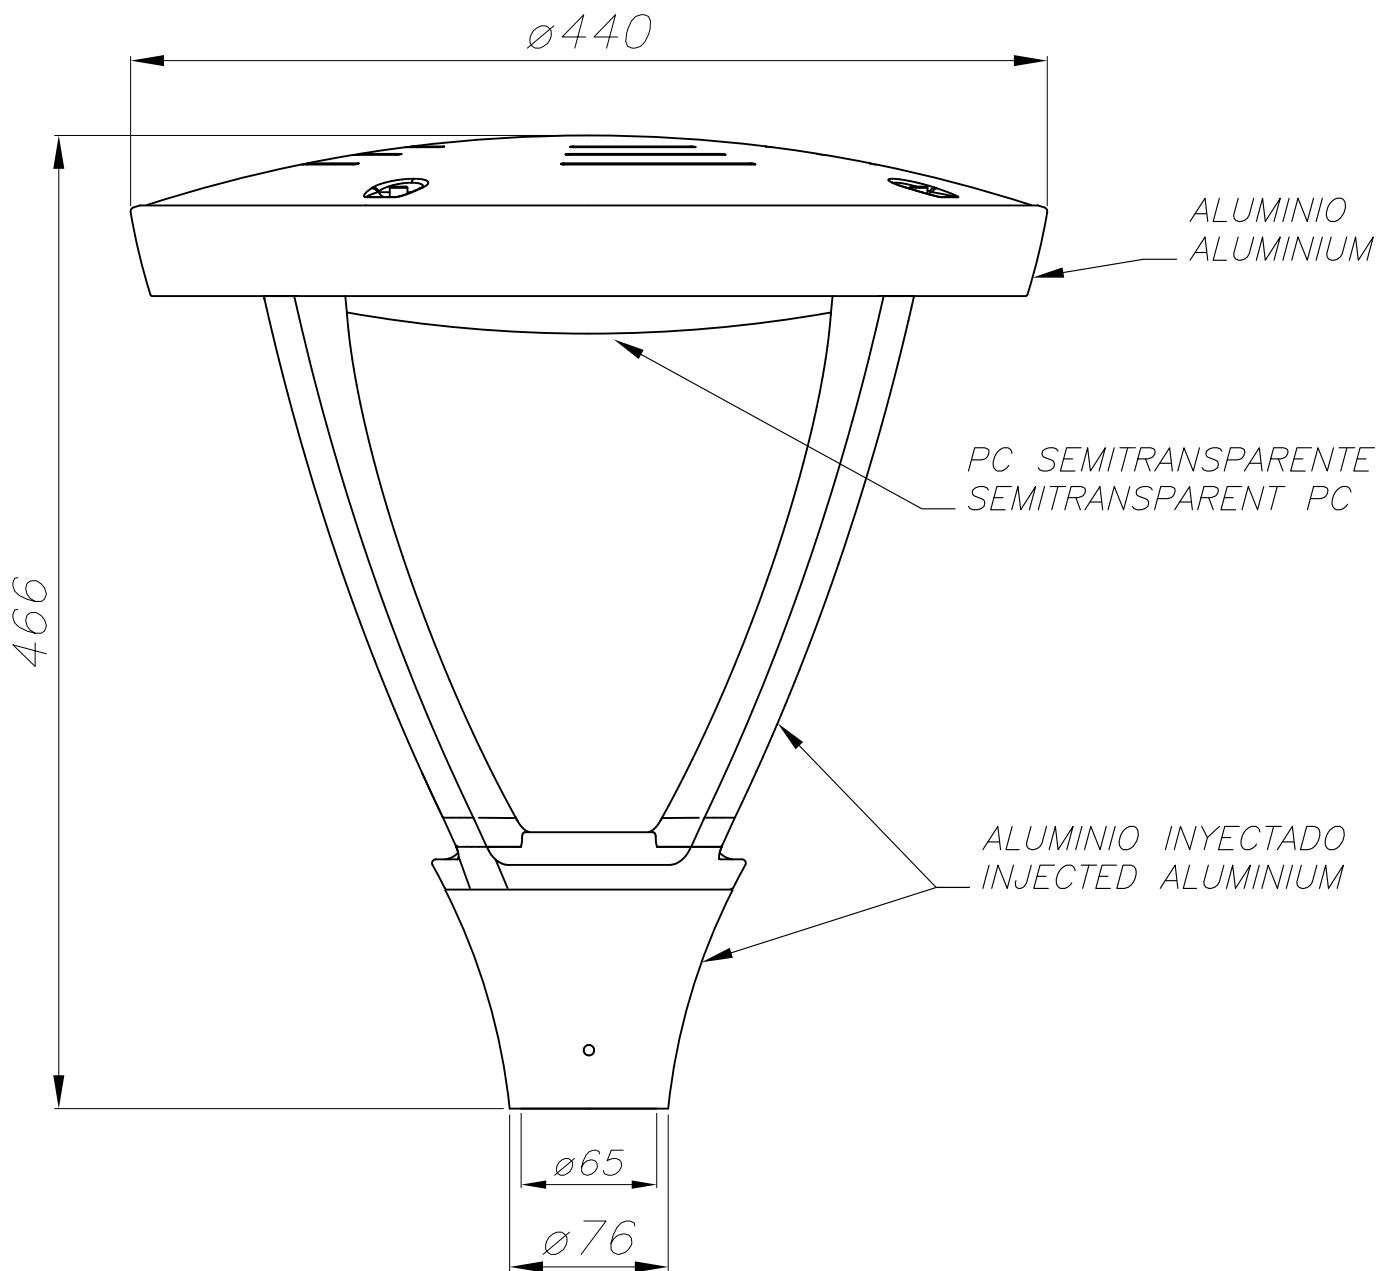



LEDS-C4

OUTDOOR

60-9913

