



Modena LED



LED version of plafond with high esthetic features and over standard parameters: UV proof, highly resistant to mechanical factors and adverse external conditions. Protection degree IP66, body of high quality material. Emergency module AW 3H. Plafonds available with motion detector, daylight sensor or emergency module. Mechanical resistance IK10.

Materials: White version: base and diffuser made of polycarbonate in white color with UV stabilization protecting against yellow. IK10 protection. Grey version: Base in grey color, diffuser made of polycarbonate (PC) in white color with UV stabilization protecting against getting yellow. IK10 protection.

Installation: Surface mounted, wall mounted.

Power: 230V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Type of LED	5630

MECHANICAL DATA

Type of installation	Surface mounted
Housing material	Polycarbonate

INFORMATION

Operating temperature range	-20 ... 40 °C
-----------------------------	---------------

CERTIFICATES

Degree of protection (IP)	IP66
Impact resistance	IK10
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes
EAC	Yes

LIGHT DATA

Light colour	White
Color rendering index	80
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I

OPTICAL DATA


Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal/mat plastic

AVAILABLE VARIANTS

Product code	Light source power [W]	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Colour temperature [K]	Colour	Info	Weight [kg]
PX3000234	1x19	1990	104	3000	White	-	1.80
PX3000241	1x19	2020	106	4000	White	-	1.80
PX3002234	1x19	1990	104	3000	Grey	-	1.80
PX3002241	1x19	2020	106	4000	Grey	-	1.80
PX3000206	1x25	2950	118	3000	White	-	2.00
PX3000213	1x25	3010	120	4000	White	-	2.00

AVAILABLE VARIANTS

Product code	Light source power [W]	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Colour temperature [K]	Colour	Info	Weight [kg]
PX3000220	1x25	2950	118	3000	White	Emergency module 3h	2.55
PX3000227	1x25	3010	120	4000	White	Emergency module 3h	2.55
PX3002206	1x25	2950	118	3000	Grey	-	2.00
PX3002213	1x25	3010	120	4000	Grey	-	2.00
PX3002220	1x25	2950	118	3000	Grey	Emergency module 3h	2.55
PX3002227	1x25	3010	120	4000	Grey	Emergency module 3h	2.55

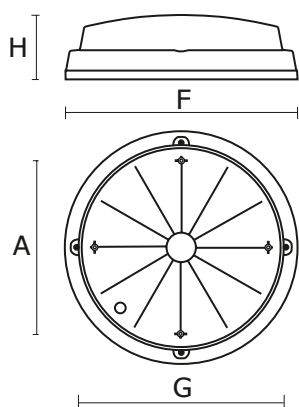

DIMENSIONS

H [mm]	F [mm]
--------	--------

110	400
-----	-----

H = Height / Depth | F = Outer diameter

MOUNTING HOLES

A [mm]

298

A = Spacing length