



Poker LS LED



Industrial luminaire for LED light sources for inline installation. Luminaire has a simple way of installation without use of additional tools. Thanks to the usage of LED light sources the luminaire is lighter, it's exploitation is more energy efficient. Aluminum reflector optimizes light distribution. Designed for lighting service spaces, warehouses and supermarkets.

Materials: Housing made of electrostatically painted aluminum (standard color: white), microprismatic diffuser (MPRM) made of PMMA or OPAL diffuser made of polycarbonate.
aluminum

Installation: Suspended.

Accessories: Simple suspension, electric suspension, S joint, chain, invisible linear joint, hitch for simple suspension, chain hitch, end cap.

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	230 V
For through out powering	Yes
Light source included	Yes
Type of LED	5630
Power factor	0.97

MECHANICAL DATA

Type of installation	Suspended
Housing material	Aluminum
Designed for light-line	Yes
Electrical track connection	No

INFORMATION

Colour	White
--------	-------

AVAILABE VARIANTS

Product code	Light source power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminarie luminous efficacy [lm/W]	Colour temperature [K]	Weight [kg]
PX2066601	1x47	OPAL	5400	114	3000	3.25
PX2066608	1x47	OPAL	5510	117	4000	3.25
PX2066638	1x73	OPAL	8100	110	3000	4.40
PX2066640	1x73	OPAL	8260	113	4000	4.40
PX2066652	1x118	OPAL	13490	114	3000	7.80
PX2066654	1x118	OPAL	13770	116	4000	7.80

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes
EAC	Yes

LIGHT DATA

Light colour	White
Color rendering index	80
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I


OPTICAL DATA

Reflector	High gloss
-----------	------------

AVAILABLE VARIANTS

Product code	Light source power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Colour temperature [K]	Weight [kg]
PX2066657	1×47	MPRM	5650	120	3000	3.25
PX2066664	1×47	MPRM	5770	122	4000	3.25
PX2066694	1×73	MPRM	8480	116	3000	4.40
PX2066696	1×73	MPRM	8650	118	4000	4.40
PX2066713	1×118	MPRM	14130	119	3000	7.80
PX2066720	1×118	MPRM	14420	122	4000	7.80

DIMENSIONS

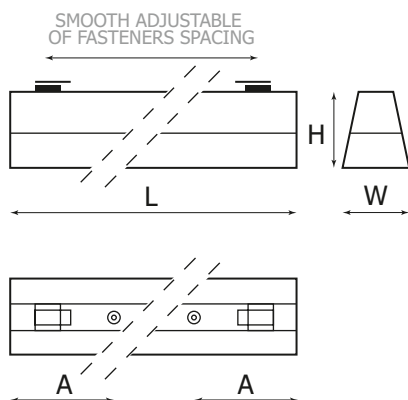

Product code	Length [mm]	W [mm]	H [mm]
PX2066601	1200	100	75
PX2066608	1200	100	75
PX2066638	1800	100	75
PX2066640	1800	100	75
PX2066652	3000	100	75
PX2066654	3000	100	75
PX2066657	1200	100	75
PX2066664	1200	100	75
PX2066694	1800	100	75
PX2066696	1800	100	75
PX2066713	3000	100	75
PX2066720	3000	100	75

Length = Length | W = Width | H = Height / Depth

ACCESSORIES

Electric element



Electrical suspension
Pieces in set: 1

PX0922021

Grey

PX0922032

White

Structural element



Poker LS LED End cap

PX2066822

White

Connecting element



Poker LS LED Invisible linear joint

PX2066801

Installation element



Simple suspension

PX0922143



Poker LS LED Chain hitch

PX2066815

White



Hitch for simple suspension

PX2066808

White



Poker LS NEW/LS II/LS LED Chain 1m

PX1903171

Poker LS NEW/LS II/LS LED New Chain 1m



Poker LS LED/LS New "S" joint

PX1903164

Poker LS NEW/LS II/LS LED joint
S