



Torino II IP65 LED



Series of luminaires recommended for industrial areas and clean rooms where increased IP protection degree is required. Version for LED light sources. Luminaire dedicated for surface installation.

Materials: Powder painted housing made of galvanized steel sheets (standard color: white), microprismatic diffuser (MPRM) made of PMMA, OPAL diffuser made of polycarbonate, tempered glass (SH MAT), parabolic (PAR) louver.

Installation: Ceiling mounted.

Power: 230 V

ELECTRICAL DATA

Light source	LED
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Type of LED	5630

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet

INFORMATION

Colour	White
--------	-------

CERTIFICATES

Degree of protection (IP)	IP65
Class of protection	I
Energy class	A+
CE	Yes
EAC	Yes


LIGHT DATA

Light colour	White
Color rendering index	80
Light distribution	DI
Class of luminaire	I

AVAILABLE VARIANTS

Product code	Light source power [W]	Luminaire power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Colour temperature [K]	Info	Weight [kg]
PX3750501	1×43	43	OPAL	3990	92	3000	600x600	5.60
PX3750508	1×43	43	OPAL	4070	94	4000	600x600	5.60
PX3750515	1×43	43	OPAL	3820	88	3000	300x1200	8.10
PX3750522	1×43	43	OPAL	3910	90	4000	300x1200	8.10
PX3750529	1×43	43	MPRM	4580	106	3000	600x600	5.60
PX3750536	1×43	43	MPRM	4670	108	4000	600x600	5.60
PX3750543	1×43	43	MPRM	4300	100	3000	300x1200	8.10
PX3750550	1×43	43	MPRM	4390	102	4000	300x1200	8.10
PX3750585	4×12.5	51	PAR	6370	124	3000	600x600	9.20
PX3750589	4×12.5	51	PAR	6500	127	4000	600x600	9.20
PX3750593	2×25.5	51	PAR	6370	124	3000	300x1200	10.00
PX3750598	2×25.5	51	PAR	6500	127	4000	300x1200	10.00
PX3750557	1×43	43	SH	4840	112	3000	600x600	7.90
PX3750564	1×43	43	SH	4940	114	4000	600x600	7.90
PX3750571	1×43	43	SH	4580	106	3000	300x1200	10.00
PX3750578	1×43	43	SH	4670	108	4000	300x1200	10.00
PX3750524	1×100	100	OPAL	9380	93	3000	600x600	6.10
PX3750526	1×100	100	OPAL	9560	95	4000	600x600	6.10

DIMENSIONS

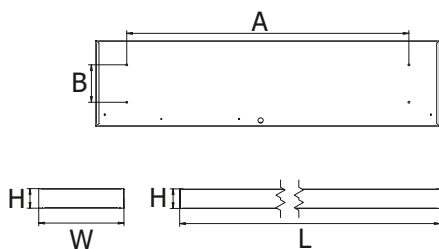

Product code	Length [mm]	W [mm]	H [mm]
PX3750501	596	596	90
PX3750508	596	596	90
PX3750515	1196	296	90
PX3750522	1196	296	90
PX3750529	596	596	90
PX3750536	596	596	90
PX3750543	1196	296	90
PX3750550	1196	296	90
PX3750585	596	596	90
PX3750589	596	596	90
PX3750593	1196	296	90
PX3750598	1196	296	90
PX3750557	596	596	90
PX3750564	596	596	90
PX3750571	1196	296	90
PX3750578	1196	296	90
PX3750524	596	596	90
PX3750526	596	596	90

Length = Length | W = Width | H = Height / Depth

MOUNTING HOLES

Product code	A [mm]	B [mm]
PX3750501	430	390
PX3750508	430	390
PX3750515	980	130
PX3750522	980	130
PX3750529	430	390
PX3750536	430	390
PX3750543	980	130
PX3750550	980	130
PX3750585	430	390
PX3750589	430	390
PX3750593	980	130
PX3750598	980	130
PX3750557	430	390
PX3750564	430	390
PX3750571	980	130
PX3750578	980	130
PX3750524	430	390
PX3750526	430	390

A = Spacing length | B = Spacing width