


Flash New LED

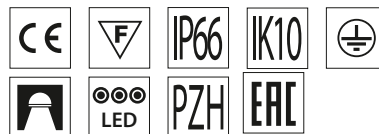

The luminaire FLASH NEW LED was designed for lighting high rooms where possibly the best energy efficiency is the most important matter.

For a separate module, installation parts have to be additionally ordered. For example:

- ceiling-mounted or suspended version:
one 135 W module and, additionally, one 1x bracket,
two 135 W modules and one 2x bracket,
- suspended version: additionally suspension,
- recessed version: 135 W module and, additionally,
one 1x bracket, suspension and masking frame for
plaster-cardboard (G/K) ceilings,
- wall-mounted version: 135 W module and, additionally,
1x adjustable wall bracket.

Materials: aluminium profile body (standard colour: black), tempered glass painted grey, COB LEDs, aluminium reflectors available with three angles of light distribution, powder painted 1x or 2x steel bracket (standard colour: black), aluminium frame for plaster cardboard ceilings – G/K (standard colour: black).

Installation: surface- or wall-mounted, suspended, recessed

Accessories: masking frame for plaster-card-board ceilings, 1x or 2x bracket (for surface-mounted or suspended version), wall bracket (for wall version), suspension

Power: 230V

ELECTRICAL DATA

Light source	LED
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes

MECHANICAL DATA

Type of installation	Universal
Housing material	Aluminum

INFORMATION

Colour	Black
--------	-------

CERTIFICATES

Degree of protection (IP)	IP66
Impact resistance	IK10
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes
PZH	Yes
EAC	Yes
For ceiling installation, fire class "F" (L)	Yes

LIGHT DATA


Light colour	White
Color rendering index	80
Colour temperature	4000K
Light distribution	DI
Class of luminaire	I

OPTICAL DATA

Louver/ shutter	SH
Diffuser colour	Grey
Diffuser material	Transparent glass

AVAILABLE VARIANTS

Product code	Light source power [W]	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Beam angle [°]	Operating temperature range [°C]	Weight [kg]
PX2063871	5×26	14000	104	30	-20 ... 40	5.20
PX2063878	5×26	14000	104	50	-20 ... 40	5.20
PX2063885	5×26	14000	104	70	-20 ... 40	5.20
PX2063886	6×28	20000	114	30	-25 ... 40	6.60
PX2063887	6×28	20000	114	50	-25 ... 40	6.60
PX2063888	6×28	20000	114	70	-25 ... 40	6.60

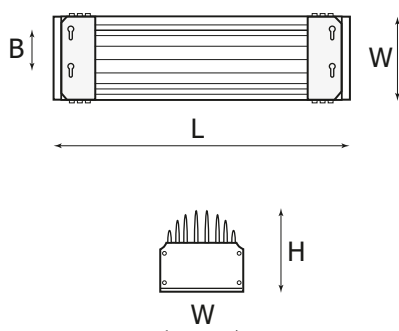

DIMENSIONS

Product code	Length [mm]	W [mm]	H [mm]
PX2063871	610	130	110
PX2063878	610	130	110
PX2063885	610	130	110
PX2063886	720	130	110
PX2063887	720	130	110
PX2063888	720	130	110

Length = Length | W = Width | H = Height / Depth

ACCESSORIES

Diffuser



Flash New Led Grid

PX2063897

IK10; 5x

Black

PX2063867

IK10; 6x

Black

Structural element



Flash New LED Masking frame

PX2063896

x5


Black

PX2063864

x6

Black

Installation element



Flash New LED Bracket 1x

PX2063890


Black



Flash New LED Bracket 2x adjustable

PX2063893

Black



Flash New LED Wall bracket

PX2063899

Black

Flash LED Suspension

PX2063894

Silver